


CONTRACT NO		COMPANY NAME DAISy			
APPROVALS	DATE	DWG USER MICROCONTROLLER			
DRAWN	050997	SIZE A3	F5CM NO. SLUDSAB2	DWG NO.	REV. 2.0
CHECKED					
ISSUED		SCALE 1/1			SHEET 2/4

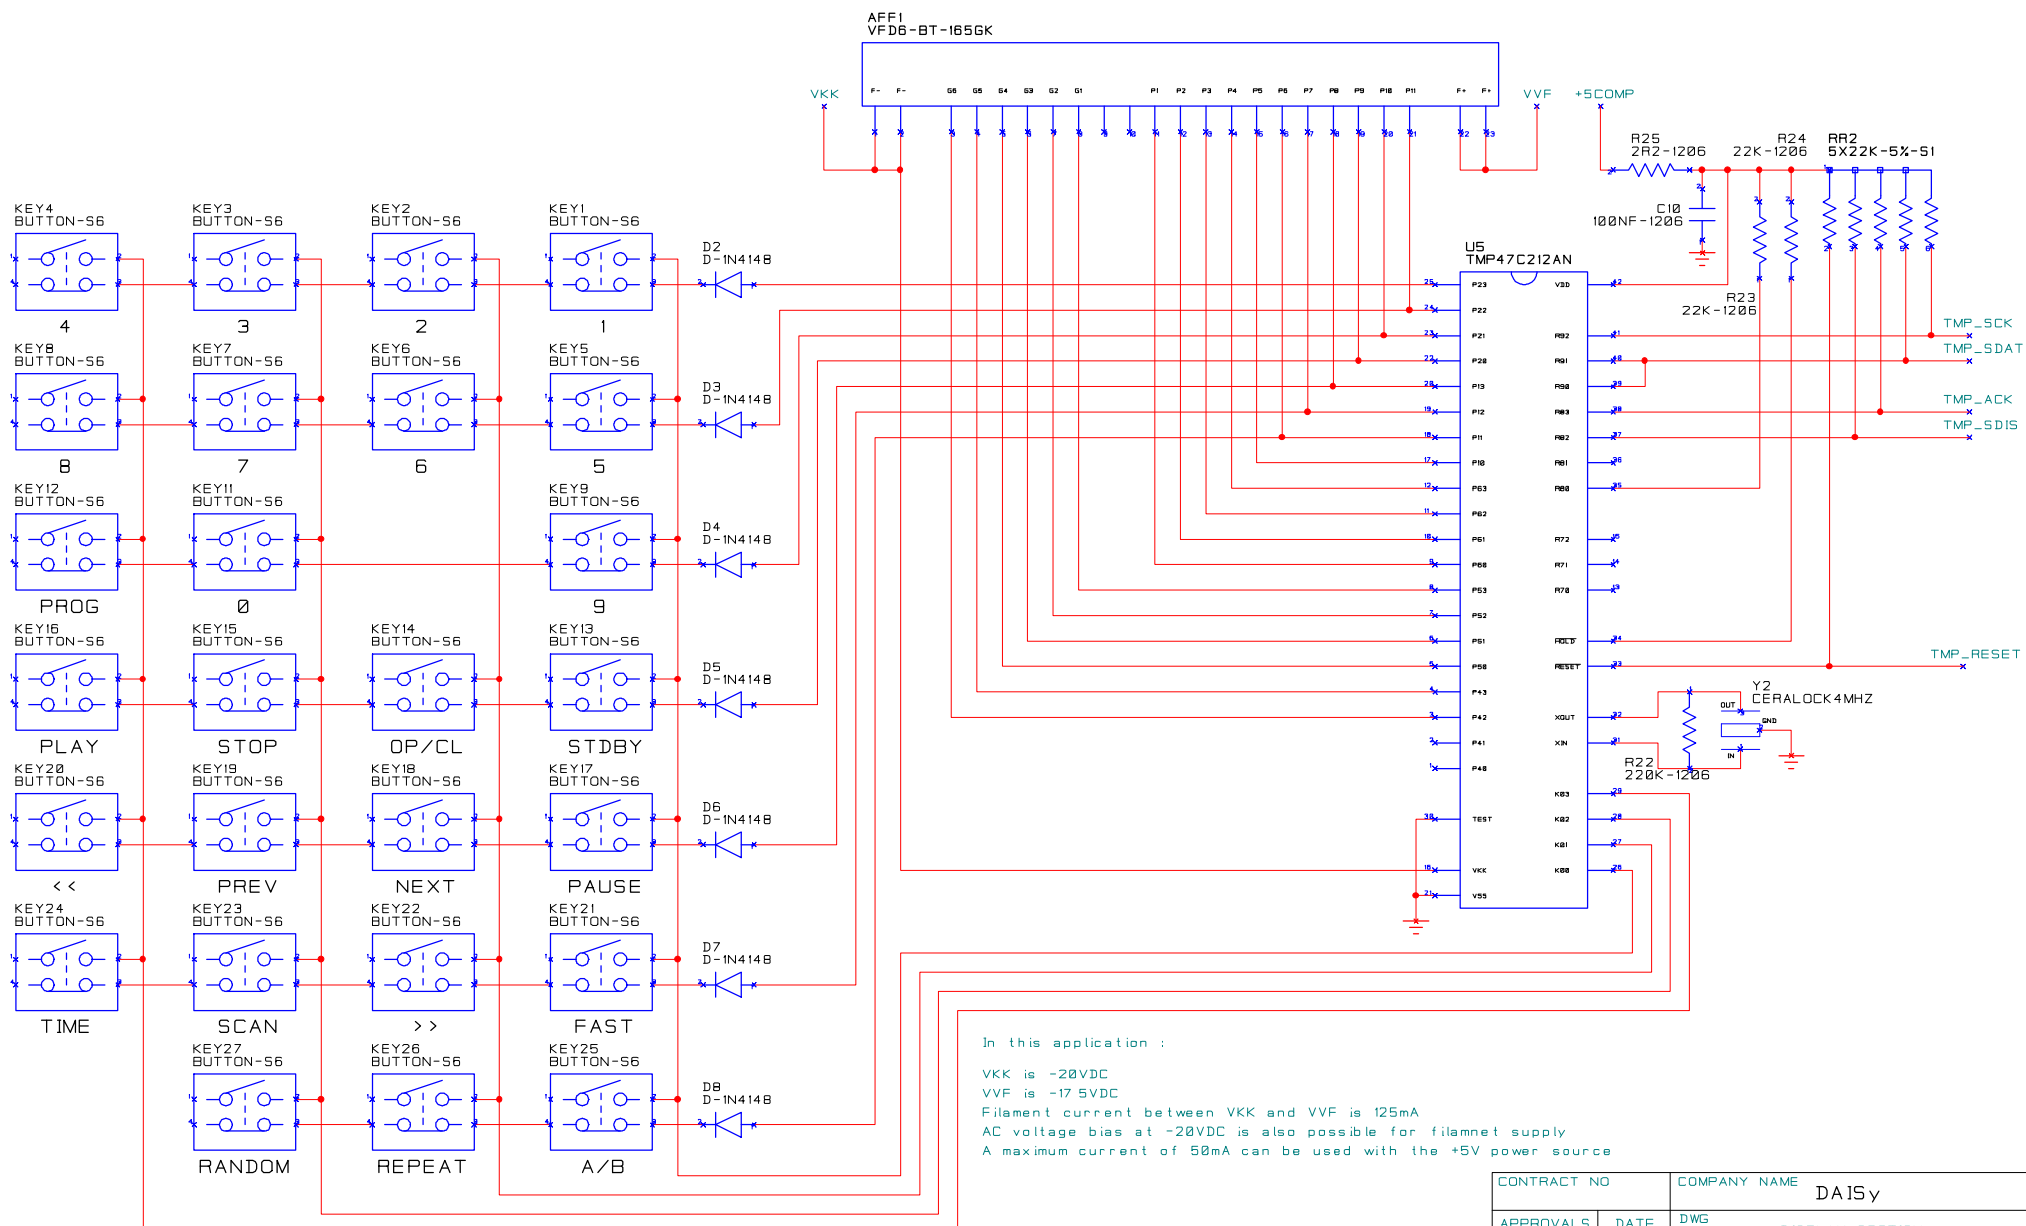

In this application :

VKK is -20VDC

VVF is -17.5VDC

Filament current between VKK and VVF is 125mA

AC voltage bias at -20VDC is also possible for filament supply

A maximum current of 50mA can be used with the +5V power source

CONTRACT NO		COMPANY NAME DAISy			
APPROVALS	DATE	DWG DISLAY SECTION			
DRAWN	050997	SIZE	FSCM NO.	DWG NO.	REV.
CHECKED		A3	SLUDSAB2		2.0
ISSUED		SCALE	1/1		SHEET 3/4